

FILM THICKNESS MEASUREMENT USING ELECTRON-BEAM INDUCED X-RAY MICROANALYSIS

Patent number: WO0195365

Publication date: 2001-12-13

Inventor: LEE SHING M

Applicant: KLA TENCOR CORP (US)

Classification:


- international: H01J37/244; H01J37/252; G01N23/22

- european: G01B15/02; G01N23/22; H01J37/252

Application number: WO2001US18677 20010607

Priority number(s): US20000210337P 20000607; US20000695726
20001023

Also published as:

 US6787773 (B1)


Cited documents:

 JP6267485
 US4472825

Report a data error here

Abstract of WO0195365

An X-ray microanalysis test system comprising a beam generator (400), which induces X-rays to emanate from a semiconductor device containing film stacks. The charged particle beam will penetrate at least two layers of a film stack (330) on a semiconductor device so that these layers may be tested. The X-rays will be detected using multiple X-ray detectors (500) that detect X-ray photons having a specific energy level. The X-rays will then be used to analyze the characteristics of the semiconductor device. Each of the multiple X-ray detectors (500) may be wavelength dispersive system (WDS) detectors. The present invention also provides a method for measuring film stack characteristics on a semiconductor device. The method for measuring includes directing an electron beam towards the semiconductor device so that the electron beam penetrates at least a conductive film layer and a liner layer, detecting the X-rays which are caused to emanate from the device with multiple X-ray detectors that detect X-ray photons having a specific energy level. The present invention also provides a method and a computer-readable medium, which determines a film stack's properties using the data collected with the test system of the present invention. The method and computer-readable medium includes selecting a set of values which estimate the film stack characteristics.

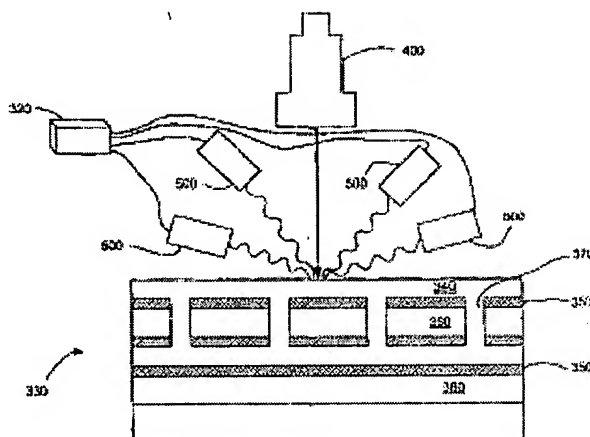

Data supplied from the esp@cenet database - Worldwide